

MTB SERIES

Belt Driven Linear Actuators



MT 105, 80, 55, 42



The MT Series offers a number of profile sizes with multiple design configurations to fit almost any application.

Features and Benefits


- High Acceleration, Speed & Rigidity
- Long Travel Length
- Low Friction, Noise & Vibration
- Strong yet Lightweight & Corrosion Resistant
- Multiple Accessories & Options

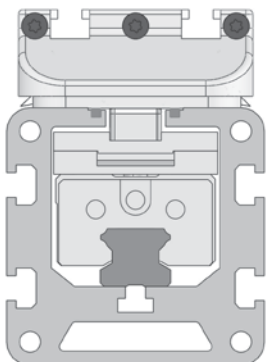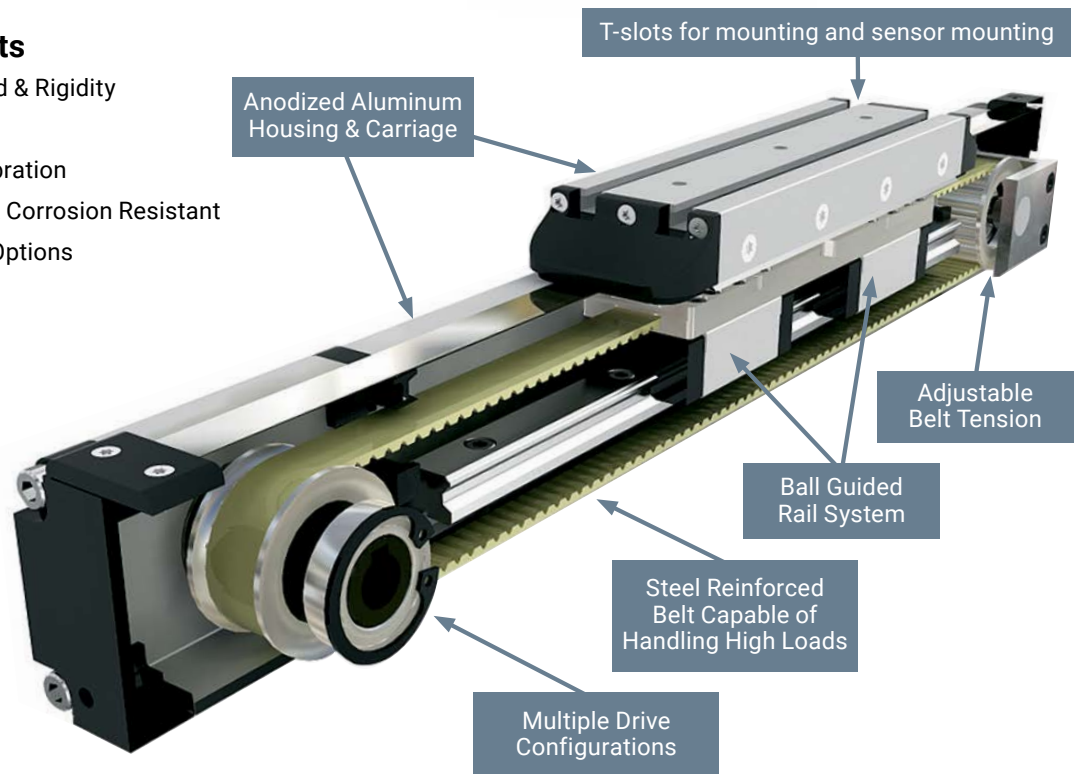

NOTE:

1. Moment arms for calculating moments should be measured from the centerline of the extrusion.
2. Limit switches must be used in order to prevent the carriage from contacting the actuator end blocks, resulting in damage.
3. 25 mm of over-travel has been added to the body length in each direction to allow for carriage over-travel. 25 mm is the recommended over-travel; although a minimum of 10 mm may be specified for special applications.

MTB 42 Dimensional information

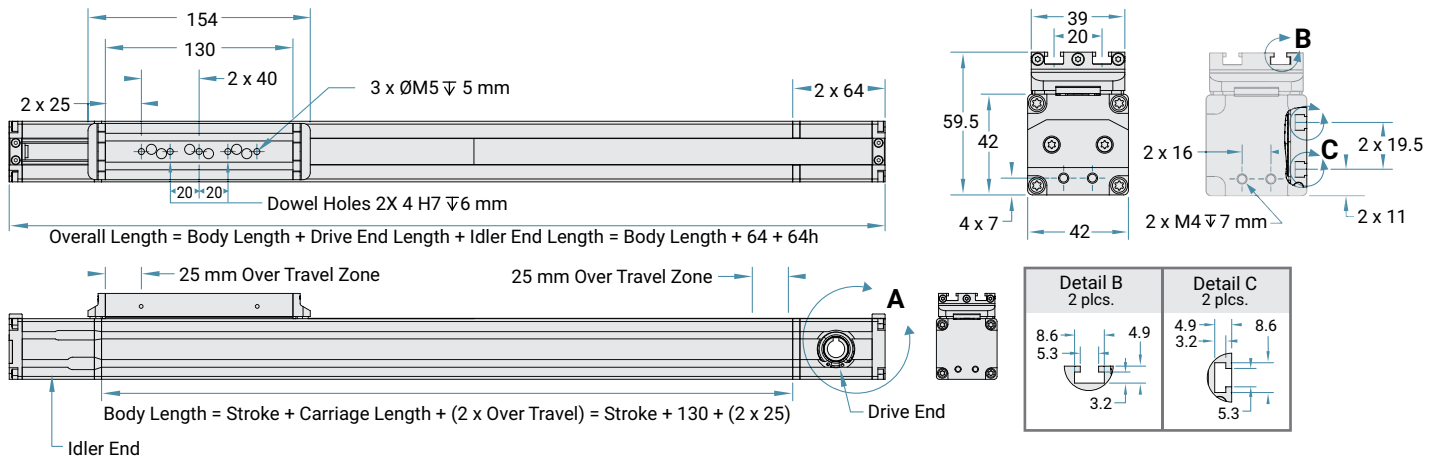


Ordering Information

Example: MTB-042D-1000-12B12

MTB	042	X	-	XXXX	-	XX	XX	-	X	-	X
Series	Size mm (Base and Height)	System Type*		Body Length**		Shaft Diameter	Shaft Type		Carriage**		Guidance Type
MTB Belt Driven Unit	42 x 42	D = Driven N = Undriven		2,000 mm (max.) Must include 50 mm over-travel For lengths greater than 1,500 mm consult factory		00 = No shaft (undriven system) 10 = 10 mm 12 = 12 mm	F = Female hollow (10) L = Left Male (12) R = Right Male (12) B = Both Male (12) 0 = No shaft (undriven system) LW = Left Male w/o Keyway RW = Right Male w/o Keyway BW = Both Male w/o Keyway		1 Standard 2 3 4		2 = Profile rail w/2 runner blocks per carriage

MTB 55 Dimensional information

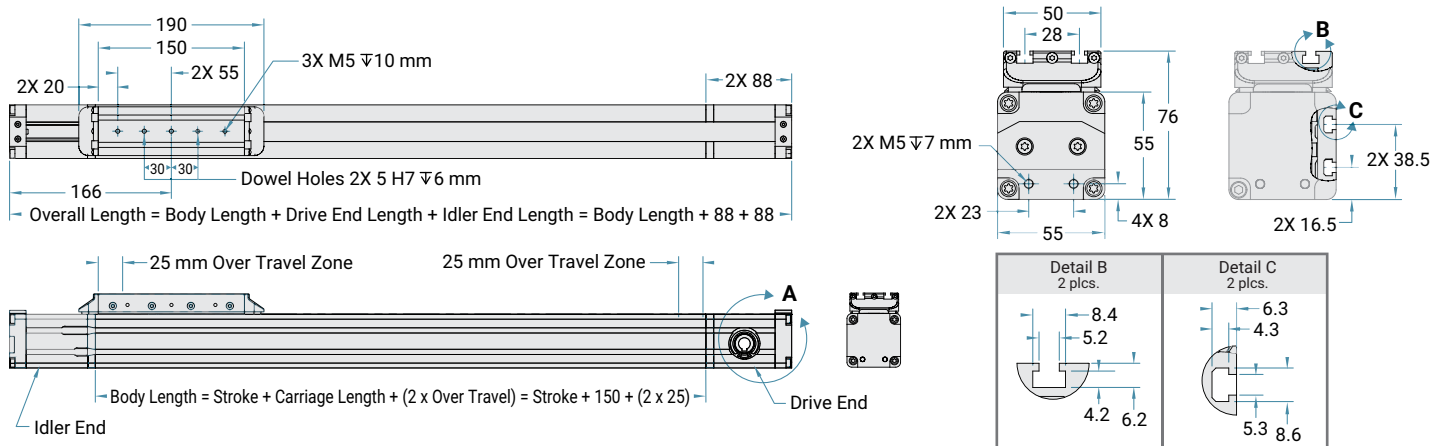


Ordering Information

Example: MTB-055D-1000-12F12

MTB	055	X	-	XXXX	-	XX	XX	-	X	-	X
Series	Size mm (Base and Height)	System Type*		Body Length**		Shaft Diameter	Shaft Type		Carriage**		Guidance Type
MTB Belt Driven Unit	55 x 55	D = Driven N = Undriven		6,000 mm (max.) Must include 50 mm over-travel For lengths greater than 1,500 mm consult factory		00 = No shaft (undriven system) 12 = 12 mm 14 = 14 mm 16 = 16 mm	F = Female hollow (12, 14) L = Left Male (16) R = Right Male (16) B = Both Male (16) 0 = No shaft (undriven system) LW = Left Male w/o Keyway RW = Right Male w/o Keyway BW = Both Male w/o Keyway		1 Standard 2 3 4		2 = Profile rail w/2 runner blocks per carriage

MTB 80 Dimensional information

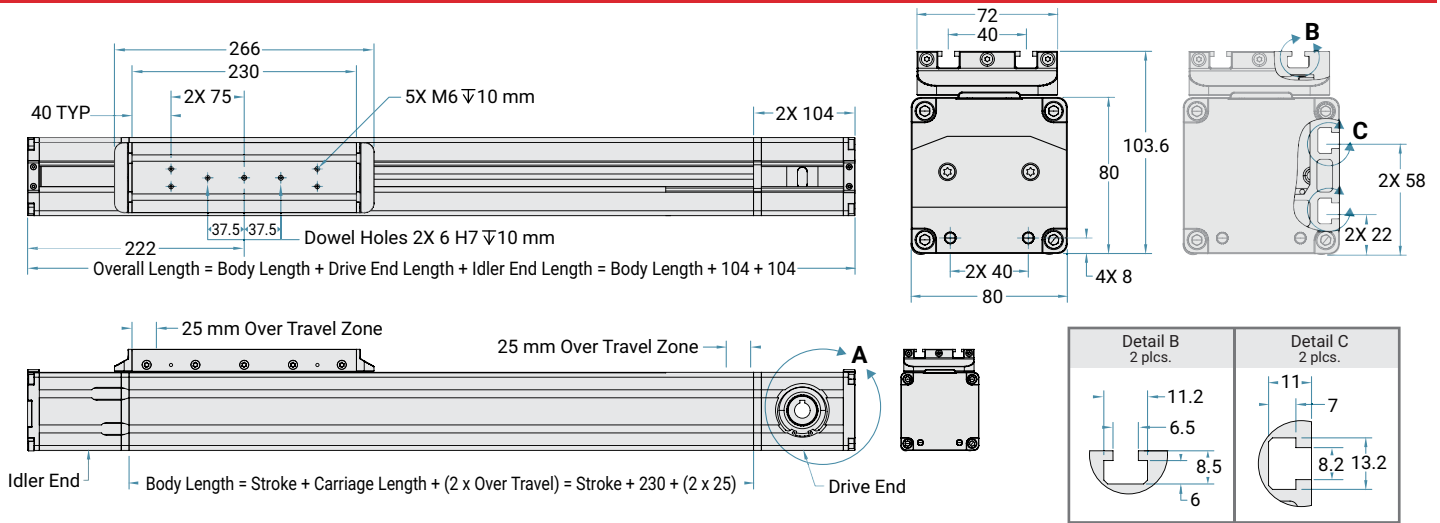


Ordering Information

Example: MTB-080D-1000-19F12

MTB	080	X	-	XXXX	-	XX	XX	-	X	-	X
Series	Size mm (Base and Height)	System Type*		Body Length**		Shaft Diameter	Shaft Type		Carriage**		Guidance Type
MTB Belt Driven Unit	80 x 80	D = Driven		6,000 mm (max.) Must include 50 mm over-travel For lengths greater than 1,500 mm consult factory		16 = 16 mm 19 = 19 mm	F = Female hollow (16,19) L = Left Male (19) R = Right Male (19) B = Both Male (19) LW = Left Male w/o Keyway RW = Right Male w/o Keyway BW = Both Male w/o Keyway		1 Standard 2 3 4		2 = Profile rail w/2 runner blocks per carriage


Detail A - Drive End

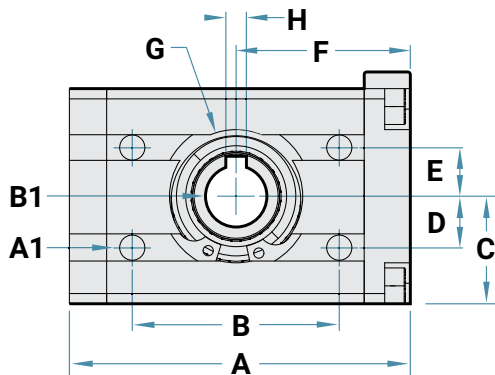

MTB Size	A mm	B MAX	C mm	D mm	E mm	F mm	G
MTB 42	64	42	21	10	9.5	34	2 x Ø30 H7 ∇1.5 mm
MTB 55	88	55	25	8.5	13.5	48.5	2 x Ø32 H7 ∇1.5 mm
MTB 80	104	71	41	19	17	54	2 x Ø55 H7 ∇2 mm

Male Shaft Type Options:

As viewed from drive end with carriage on top

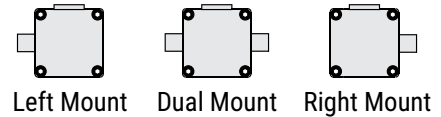

MTB Size	Male Input Shaft Size	A1		B1		H	
		Square Nut Included	Female mm	Male mm	Female Bore Dia.	Keyway Width	
MTB 42	12H7 +0.018/-0 Dia. X 18 mm length	M5 DIN526	Ø 10	Ø 12	10H7 -0/+0.018	3N9 -0.004/-0.029	
MTB 55	16H7 +0.018/-0 Dia. X 18.5 mm length	M5 NIN557	Ø 12 Ø 14	Ø 16	12H7 -0/+0.018 14H7 -0/+0.018	4N9 -0.030/+0 5N9 -0.030/+0	
MTB 80	19H7 +0.021/-0 Dia. X 30 mm length	M8 DIN557	Ø 16 Ø 19	Ø 19	16H7 -0/+0.018 19H7 -0/+0.018	5N9 -0.030/+0 6N9 -0.030/+0	

* No belt or motor mount, contact manufacturer for "N" version.

** Contact manufacturer for other options and availability.

Profile rail will be segmented for lengths over 1 m.

MTB 105

Belt Driven Linear Actuators



Series	Size	Stroke mm	Shaft
MTB	105	0000	F22


- F22 = Female shaft Ø22 mm with keyshaft
- F25 = Female shaft Ø25 mm with keyshaft
- M25L = Male shaft Ø25 mm mount left
- M25R = Male shaft Ø25 mm mount right
- D25 = Double male shaft Ø25 mm

Male Shaft Type Options:

As viewed from drive end with carriage on top



Left Mount




Dual Mount



Right Mount

Thread is M8x1.25 deep 12 mm

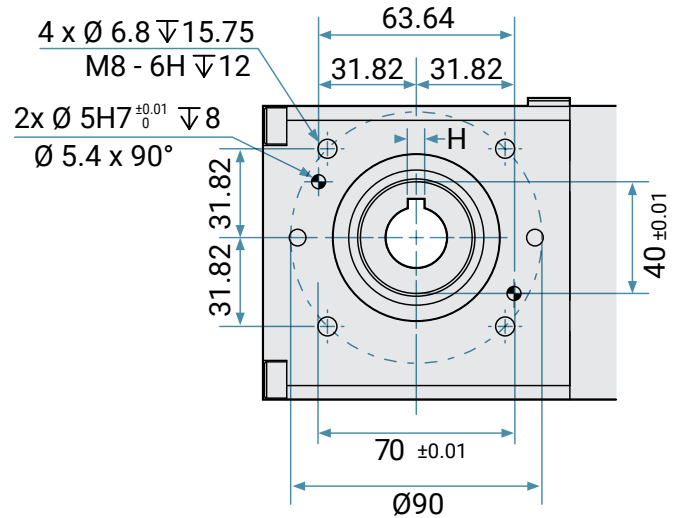




MTB Size	Male Input Shaft Size	Female mm	Male mm	Female Bore Dia.	H	Keyway Width
MTB 105	25H7 +0.021/-0 Dia. X 37.5 mm length	Ø 22 Ø 25	Ø 25	22H7 -0/+0.021 25H7 -0/+0.021		6N9 -0.030/+0 8N9 -0.030/+0

* No belt or motor mount, contact manufacturer for "N" version.

** Contact manufacturer for other options and availability.


Profile rail will be segmented for lengths over 1 m.

MTB 105 Dimensional information

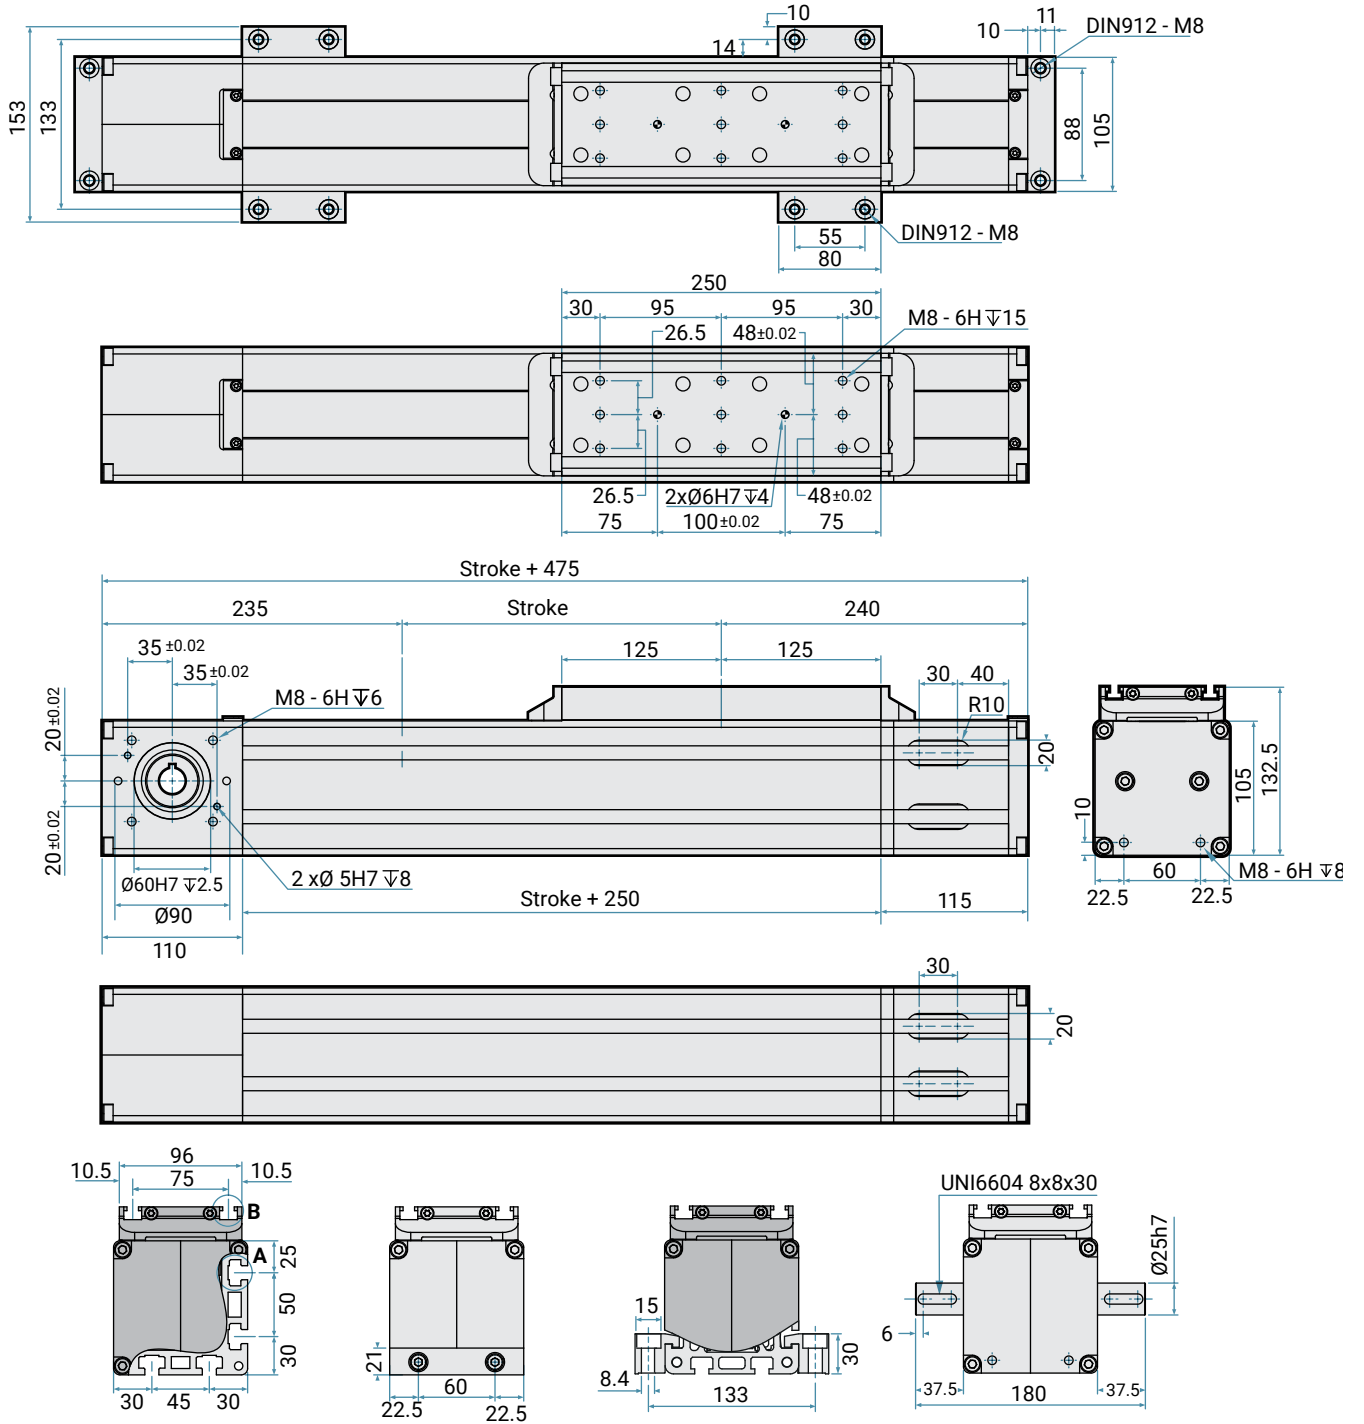

Technical Data

Size	mm		42 x 42 (1.65 x 1.65)		55 x 55 (2.17 x 2.17)		80 x 80 (3.15 x 3.15)		105 x 105 (4.13 x 4.13)		
	in										
Max. Speed	m/s	in/s	3	118.11	3	118.11	3	118.11	3	118.11	
Max. Stroke Length	mm	in	2000	78.74	6000	236.22	6000	236.22	6000	236.22	
Min. Stroke Length	mm	in	100	3.94	100	3.94	100	3.94	100	3.94	
Pulley Drive Ratio	mm	in	90	3.54	120	4.72	160	6.30	210	8.27	
Number of Pulley Teeth			18		24		32		21		
MAX RPM			2,000		1,500		1,125		850		
Base Weight	Kg	lb	1.60	3.53	4.80	10.58	6.00	13.23	12.50	27.56	
Add for 100 mm or 3.94 in of Stroke	Kg	lb	0.25	0.55	0.37	0.816	0.90	1.98	1.50	3.31	
Max. Load	Fx	N	lbf	460	103	820	184	1650	370.93	2750	618.22
	Fy	N	lbf	1560	351	1850	416	4500	1,011.64	7500	1,686.07
	Fz	N	lbf	1560	351	1850	416	4500	1,011.64	7500	1,686.07
Max. Moments	Mx	Nm	lbf-in	20	177	25	221	80	708	120	1,062.10
	My	Nm	lbf-in	55	487	120	1,062	450	3,983	700	6,195.52
	Mz	Nm	lbf-in	55	487	120	1,062	450	3,983	700	6,195.52
Moment of Inertia	Ix	cm ⁴	in ⁴	12	0.29	36	0.86	183	4.39	440	10.571
	Iy	cm ⁴	in ⁴	15	0.36	45	1.08	226	5.42	535	12.853
Max. Radial Load on Input Shaft	N	lbf	220	49.5	300	67.4	300	67.4	400	89.92	
No Load Torque	Nm	lbf-in	0.8	7.1	1	8.9	1.1	9.7	0.8	7.1	



For combined loads, the combined loading cannot exceed the following formula.

$$\frac{F_{yA}}{F_y} + \frac{F_{zA}}{F_z} + \frac{M_{xA}}{M_x} + \frac{M_{yA}}{M_y} + \frac{M_{zA}}{M_z} \leq 1$$



End Mount Style Clamp

MTB Size	Part Number	Screw
MTB 42	MTB042A-A0AA001-KIT	M4 SHCS
MTB 55	MTB055A-A1AA001-KIT	M5 SHCS
MTB 80	MTB080A-A2AA001-KIT	M6 SHCS
MTB 105	MTB105A-A3AA001-KIT	M8 SHCS



Mid Mount Style Clamp

MTB Size	Part Number	Screw
MTB 42	MTB042A-A0AA002-KIT	M4 SHCS
MTB 55	MTB055A-A1AA002-KIT	M5 SHCS
MTB 80	MTB080A-A2AA002-KIT	M6 SHCS
MTB 105	MTB105A-A3AA002-KIT	M8 SHCS



6402 E. Rockton Rd. Roscoe, Illinois 61073 USA
+1.815.389.5600 • Fax: +1.815.389.5790

Visit pbclinear.com for Product Information and 2D/3D CAD Downloads

Call **1-800-962-8979** for Technical and Application Information

The data and specifications in this publication have been carefully compiled and are believed to be accurate and correct. However, it is the responsibility of the user to determine and ensure the suitability of PBC Linear® products for a specific application. PBC Linear only obligation will be to repair or replace without charge, any defective components if returned promptly. No liability is assumed beyond such replacement. Specifications are subject to change without notice. LITMTB-100 [v12 05-2024]